PALMETTO BAY TOWNHOMES - BUILDING 2

14 two-story townhome units | 17800 SW 87th Ave (fictional), Miami-Dade County, FL

Code: Florida Building Code 8th Ed. | High-Velocity Hurricane Zone (HVHZ)

SHEET INDEX

SHEET	TITLE
G-001	Cover Sheet & Sheet Index
A-101	First Floor Plan
A-201	Exterior Elevations
A-601	Door & Window Schedules
S-101	Foundation Plan
S-201	Roof Framing & Hurricane Strap Details

PROJECT NOTES

1. Owner: Palmetto Bay Holdings LLC (fictional).

2. Contractor shall verify all existing conditions prior to bid.

3. MEP drawings to be issued under separate cover (date TBD).

PROJECT: PALMETTO BAY TOWNHOMES - BUILDING 2

ARCHITECT: Seabreeze Design Studio (fictional)

SHEET TITLE: COVER SHEET & SHEET INDEX

DATE: 2026-09-15 REV: 2 (Issued for Bid)

SCALE: AS NOTED

G-001

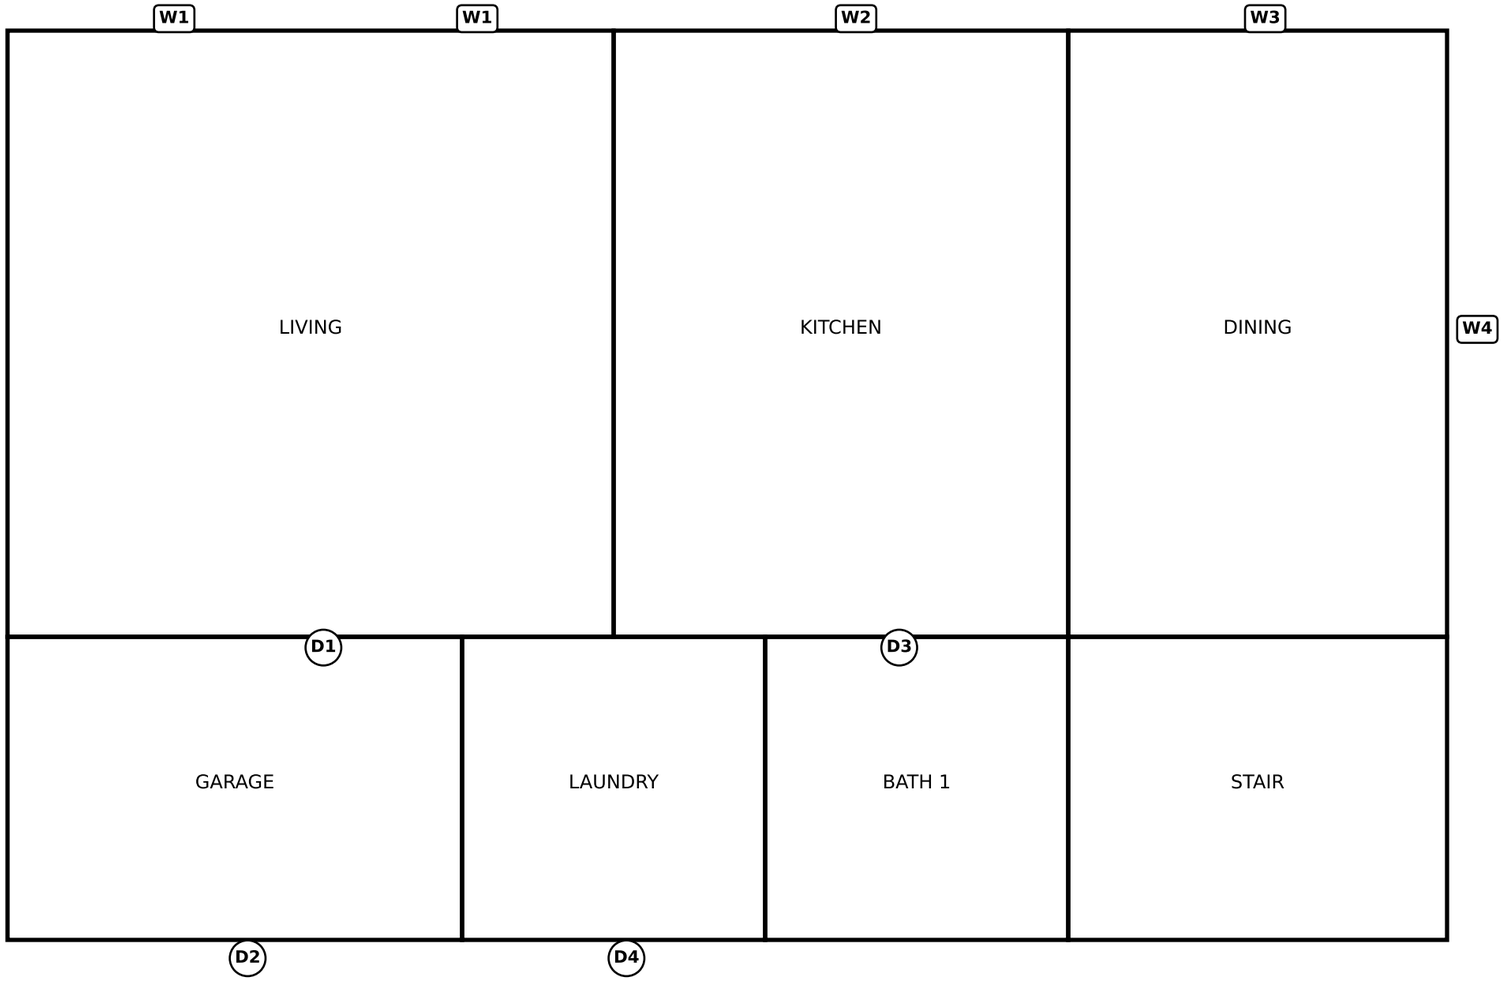

GENERAL NOTES

1. All dimensions to face of stud unless noted.
2. All exterior openings to be impact-rated per HVHZ requirements.
3. Kitchen cabinets and countertops by others.
4. Hurricane straps at all trusses, see S-201.
5. Flooring finish TBD by owner.
6. Waterproofing at garage slab: see spec.

PROJECT:	PALMETTO BAY TOWNHOMES - BUILDING 2
ARCHITECT:	Seabreeze Design Studio (fictional)
SHEET TITLE:	FIRST FLOOR PLAN
DATE:	2026-09-15 REV: 2 (Issued for Bid)
SCALE:	1/4" = 1'-0"

A-101

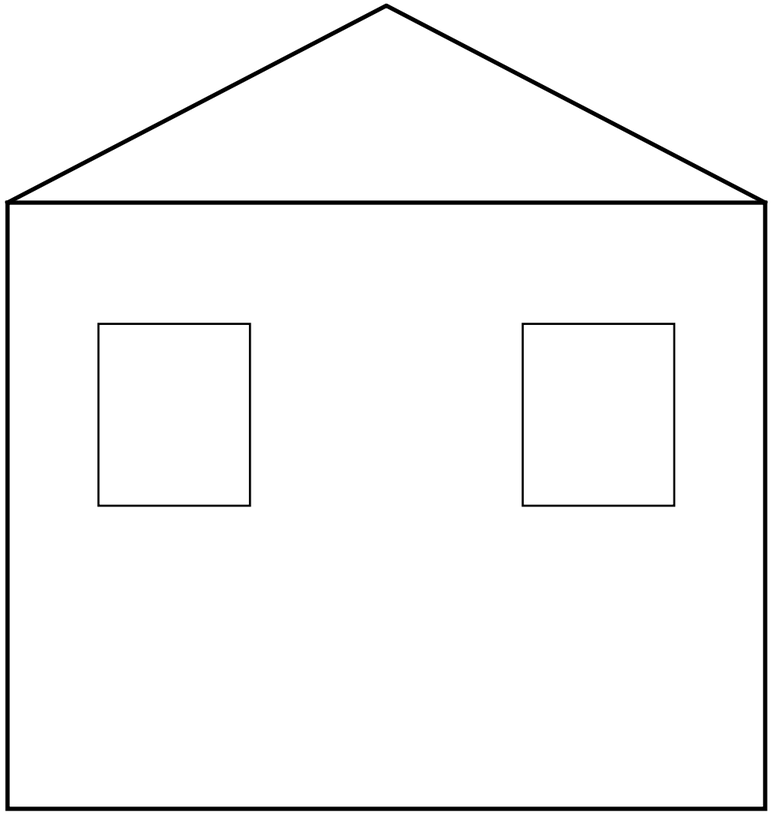

FRONT (NORTH) ELEVATION

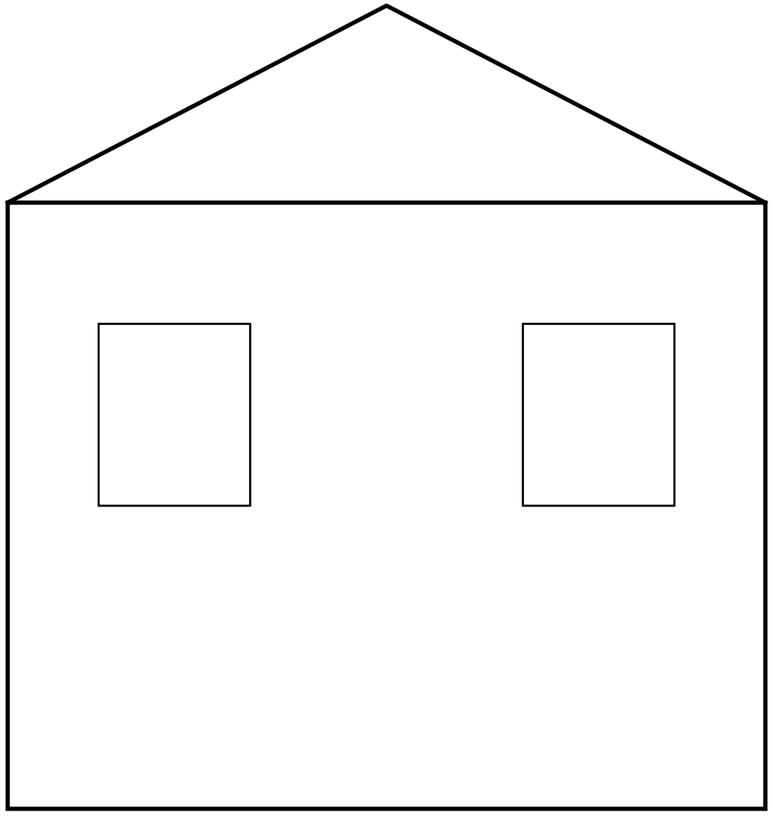

REAR (SOUTH) ELEVATION

ELEVATION NOTES

1. Roofing: standing seam metal roof, manufacturer TBD.

2. Stucco finish color per owner selection.

PROJECT:	PALMETTO BAY TOWNHOMES - BUILDING 2
ARCHITECT:	Seabreeze Design Studio (fictional)
SHEET TITLE:	EXTERIOR ELEVATIONS
DATE:	2026-09-15 REV: 2 (Issued for Bid)
SCALE:	AS NOTED

A-201

WINDOW SCHEDULE

MARK	SIZE	TYPE	IMPACT	PRODUCT APPROVAL	QTY
W1	3'-0" x 5'-0"	Single Hung	YES	Miami-Dade NOA 23-0412.05	28
W2	4'-0" x 4'-0"	Horizontal Roller	YES	Miami-Dade NOA 22-1108.11	14
W3	6'-0" x 8'-0"	Fixed	YES		14
W4	2'-0" x 3'-0"	Awning	NO		14
W5	8'-0" x 7'-0"	Sliding Glass Door	YES	FL# TBD	14

DOOR SCHEDULE

MARK	SIZE	TYPE	LOCATION	IMPACT	PRODUCT APPROVAL
D1	3'-0" x 8'-0"	Fiberglass Entry	Exterior	YES	Miami-Dade NOA 21-0930.02
D2	16'-0" x 8'-0"	Overhead Garage	Exterior	YES	
D3	2'-8" x 6'-8"	Solid Core Wood	Interior	N/A	N/A
D4	2'-6" x 6'-8"	Hollow Core Wood	Interior	N/A	N/A

SCHEDULE NOTES

1. All exterior windows and doors shall carry a valid

2. Miami-Dade NOA (HVHZ). Submit with shop drawings.

3. Hardware sets per spec section 08 71 00.

4. Garage door wind load rating: verify with engineer.

PROJECT: PALMETTO BAY TOWNHOMES - BUILDING 2

ARCHITECT: Seabreeze Design Studio (fictional)

SHEET TITLE: DOOR & WINDOW SCHEDULES

DATE: 2026-09-15 REV: 2 (Issued for Bid)

SCALE: AS NOTED

A-601

STRUCTURAL NOTES

1. Concrete: 3000 psi min @ 28 days.

2. Soil bearing capacity: per geotechnical report (not provided).

3. Termite pretreatment required.

PROJECT:	PALMETTO BAY TOWNHOMES - BUILDING 2
ARCHITECT:	Seabreeze Design Studio (fictional)
SHEET TITLE:	FOUNDATION PLAN
DATE:	2026-09-15 REV: 2 (Issued for Bid)
SCALE:	AS NOTED

S-101